


VTR - STY

Panel's composition

SKIN OF POLYESTER GRP with white gelcoat and protective film on gelcoat side
Thickness: from 1,1 mm to 3 mm
 suitable for contact with food products



CORE
 extruded Polystyrene foam
Density: 30 - 40 - 45 Kg/m³

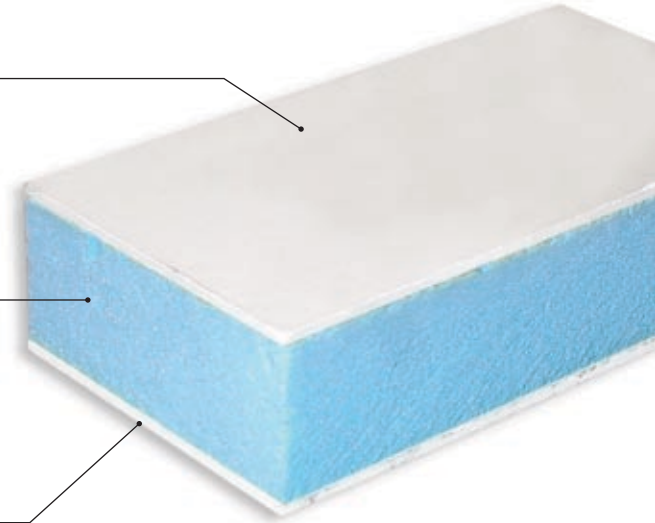

On request: •RAL colours

Panel's weight					
EXAMPLE	<ul style="list-style-type: none"> Polystyrene foam core, density 30 kg/m³ Thickness starting from 20 mm to 104 mm Thickness tolerance + 0/-1 mm Dimension tolerance +/-30 mm 				
	<table border="1"> <tr> <td>Total thickness mm</td> <td>24</td> <td>34</td> <td>44</td> </tr> </table>	Total thickness mm	24	34	44
	Total thickness mm	24	34	44	
	<table border="1"> <tr> <td>SKIN thickness mm</td> <td colspan="3">1,6 - 1,6</td> </tr> </table>	SKIN thickness mm	1,6 - 1,6		
	SKIN thickness mm	1,6 - 1,6			
<table border="1"> <tr> <td>CORE thickness mm</td> <td>20,8</td> <td>30,8</td> <td>40,8</td> </tr> </table>	CORE thickness mm	20,8	30,8	40,8	
CORE thickness mm	20,8	30,8	40,8		
<table border="1"> <tr> <td>Weight kg/m²</td> <td>6</td> <td>6,3</td> <td>6,6</td> </tr> </table>	Weight kg/m²	6	6,3	6,6	
Weight kg/m²	6	6,3	6,6		

Standard dimensions (max) (other dimensions available on request)
Dimension tolerance ±30mm

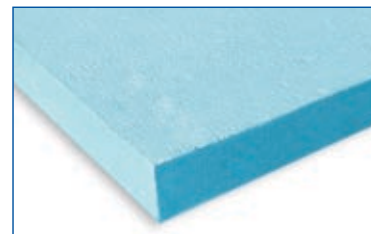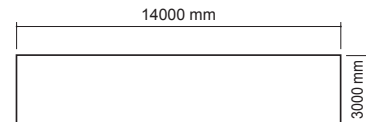

Polystyrene foam core