


## Compocel® Alf

### Panel's composition

SKINS OF ALUMINIUM pre-painted in white,  
Thickness mm: 1,0


CORE  
Foam

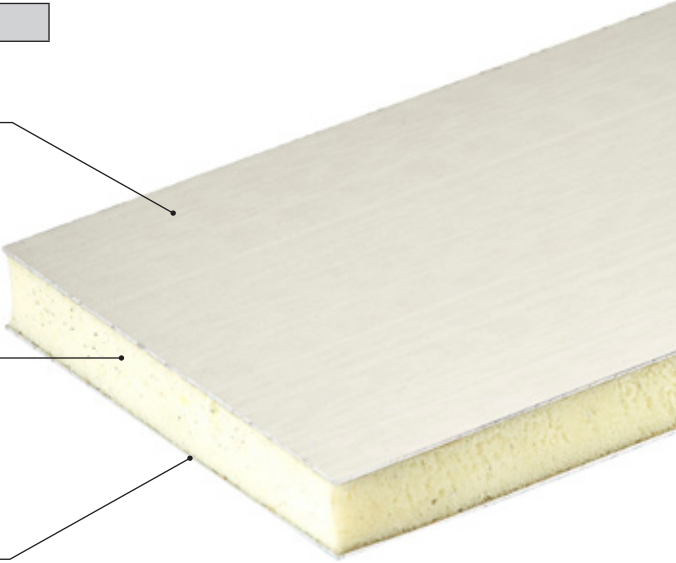

- On request:
- skin in different colours
  - different types and thicknesses of polystyrene foam (for more information see data sheet "PVC foam cores")

EXAMPLE	Panel's weight				
	<ul style="list-style-type: none"> <li>• Thickness' tolerance <math>\pm 0,3</math> mm</li> <li>• Dimension's tolerance <math>\pm 30</math> mm</li> </ul>				
	Total thickness mm	10	15	20	25
	SKINS' thickness mm	1 + 1			
	CORE'S thickness mm	8	13	18	23
Weight kg/m <sup>2</sup>	6,7	7	7,3	7,6	

**Standard dimensions**  
 (other dimensions available on request)  
**Dimension tolerance  $\pm 30$ mm**



### PROCESSING METHODS

Cutting to size

Milling

Drilling

Joining

Cut to shape

Panel folding

Panel edgings

Inserts

Painting

Veneering